

PEARSON
Prentice
Hall


Engineering Mechanics: Statics Tenth Edition

CHAPTER

STRUCTURAL ANALYSIS

UMBC

•College of Engineering •Department of Mechanical Engineering



by
Dr. Ibrahim A. Assakkaf
SPRING 2007
ENES 110 – Statics
Department of Mechanical Engineering
University of Maryland, Baltimore County

6c

UMBC Chapter 6c. STRUCTURAL ANALYSIS Slide No. 1

Frames and Machines (Section 6.6)


Lecture's Objectives:

Students will be able to:

- Draw the free body diagram of a frame or machine and its members.
- Determine the forces acting at the joints and supports of a frame or machine.

In-Class Activities:

- Reading quiz
- Applications
- Analysis of a frame/machine
- Concept quiz
- Problem solving (Ex.2)
- Attention quiz



ENES110 ©Assakkaf_SP07


Reading Quiz

1. Frames and machines are different as compared to trusses since they have _____.
 - A) only two-force members
 - B) only multiforce members
 - C) at least one multiforce member
 - D) at least one two-force member

2. Forces common to any two contacting members act with _____ on the other member.
 - A) equal magnitudes but opposite sense
 - B) equal magnitudes and the same sense
 - C) different magnitudes but opposite sense
 - D) different magnitudes but the same sense

ENES110 ©AsstProf_SP07

Applications

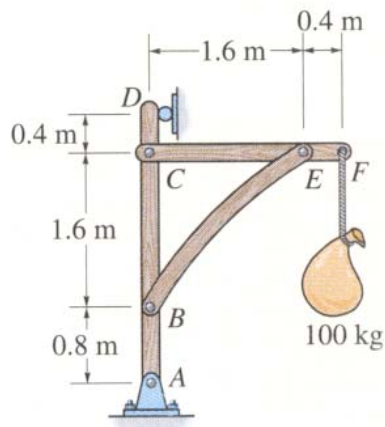


Frames are commonly used to support various external loads.

How is a frame different than a truss? How can you determine the forces at the joints and supports of a frame?

ENES110 ©AsstProf_SP07

Applications (cont'd)


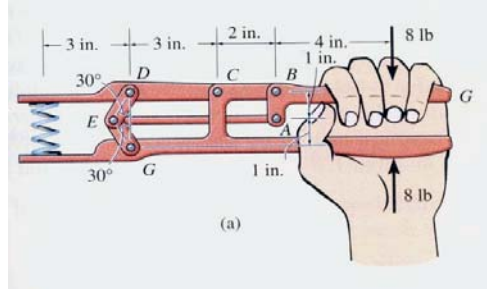


Machines, like these above, are used in a variety of applications. How are they different from trusses and frames?

How can you determine the loads at the joints and supports? These forces and moments are required when designing the machine members.

ENES110 ©AsstProf_SP07

Frames and Machines: Definitions

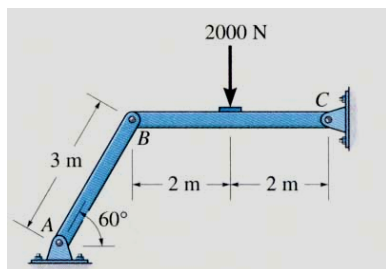


Frames and machines are two common types of structures that have at least one multi-force member. (Recall that trusses have nothing but two-force members).

Frames are generally stationary and support external loads.

Machines contain moving parts and are designed to alter the effect of forces.

ENES110 ©AsstProf_SP07


Steps for Analyzing a Frame or Machine



1. Draw the FBD of the frame or machine and its members, as necessary.

Hints:

- a) Identify any two-force members, b) Forces on contacting surfaces (usually between a pin and a member) are equal and opposite, and,
- c) For a joint with more than two members or an external force, it is advisable to draw a FBD of the pin.




2. Develop a strategy to apply the equations of equilibrium to solve for the unknowns.

Problems are going to be challenging since there are usually several unknowns. A lot of practice is needed to develop good strategies.

ENES110 ©AsstProf_SPO7

Example 1

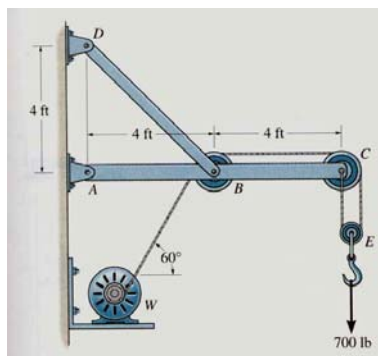

Given: The wall crane supports an external load of 700 lb.


Find: The force in the cable at the winch motor *W* and the horizontal and vertical components of the pin reactions at *A*, *B*, *C*, and *D*.

Plan:


- a) Draw FBDs of the frame's members and pulleys.
- b) Apply the equations of equilibrium and solve for the unknowns.

ENES110 ©AsstProf_SPO7

Example 1 (cont'd)



FBD of the Pulley E




Necessary Equations of Equilibrium:

$$\uparrow + \sum F_y = 2T - 700 = 0$$

$$T = 350 \text{ lb}$$

ENES110 ©AsstKat_SP07

Example 1 (cont'd)




$$\rightarrow + \sum F_x = C_x - 350 = 0$$

$$C_x = 350 \text{ lb}$$

$$\uparrow + \sum F_y = C_y - 350 = 0$$

$$C_y = 350 \text{ lb}$$

A FBD of pulley C

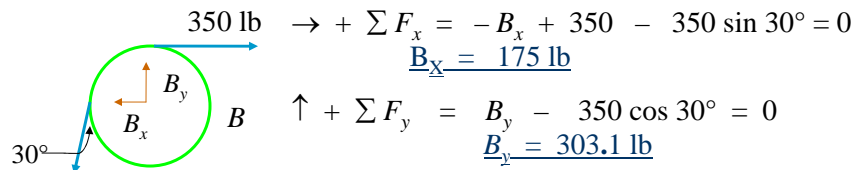

$$\rightarrow + \sum F_x = -B_x + 350 - 350 \sin 30^\circ = 0$$

$$B_x = 175 \text{ lb}$$


$$\uparrow + \sum F_y = B_y - 350 \cos 30^\circ = 0$$

$$B_y = 303.1 \text{ lb}$$


A FBD of pulley B

ENES110 ©AsstKat_SP07

Example 1 (cont'd)



Please note that member *BD* is a two-force member.

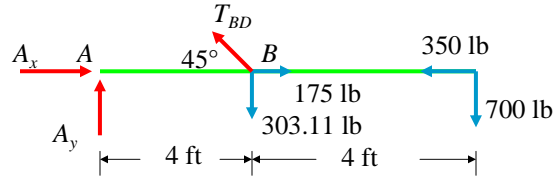

A FBD of member *ABC*

$$\curvearrowleft + \sum M_A = T_{BD} \sin 45^\circ (4) - 303.1 (4) - 700 (8) = 0$$

$$\underline{T_{BD} = 2409 \text{ lb}}$$

$$\uparrow + \sum F_y = A_y + 2409 \sin 45^\circ - 303.1 - 700 = 0$$


$$\underline{A_y = -700 \text{ lb}}$$

$$\rightarrow + \sum F_x = A_x - 2409 \cos 45^\circ + 175 - 350 = 0$$


$$\underline{A_x = 1880 \text{ lb}}$$

ENES110 ©Asst.Kaf_Sp07

Example 1 (cont'd)



A FBD of member *BD*





At *D*, the *x* and *y* component are

$$\rightarrow + D_x = -2409 \cos 45^\circ = -1700 \text{ lb}$$

$$\uparrow + D_y = 2409 \sin 45^\circ = 1700 \text{ lb}$$



ENES110 ©Asst.Kaf_Sp07

Concept Quiz

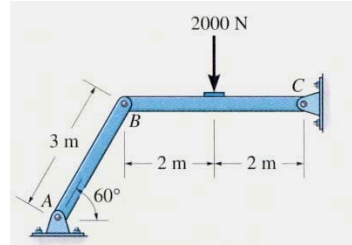


- The figures show a frame and its FBDs. If an additional couple moment is applied at C, then how will you change the FBD of member BC at B?
 - No change, still just one force (F_{AB}) at B.
 - Will have two forces, B_x and B_y , at B.
 - Will have two forces and a moment at B.
 - Will add one moment at B.

Concept Quiz (cont'd)

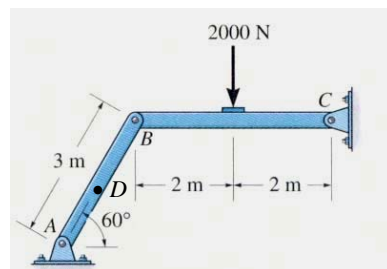

- The figures show a frame and its FBDs. If an additional force is applied at D, then how will you change the FBD of member BC at B?
 - No change, still just one force (F_{AB}) at B.
 - Will have two forces, B_x and B_y , at B.
 - Will have two forces and a moment at B.
 - Will add one moment at B.

Example 2

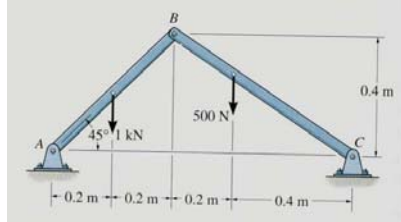

Given: A frame and loads as shown.


Find: The reactions that the pins exert on the frame at A, B and C.

Plan:



- Draw a FBD of members AB and BC.
- Apply the equations of equilibrium to each FBD to solve for the six unknowns. Think about a strategy to easily solve for the unknowns.

ENES110 ©Assakkaf_SP07

Example 2 (cont'd)



FBDs of members AB and BC:



Equating moments at A and C to zero, we get:

$$\curvearrowleft + \sum M_A = B_x (0.4) + B_y (0.4) - 1000 (0.2) = 0$$




$$\curvearrowleft + \sum M_C = -B_x (0.4) + B_y (0.6) + 500 (0.4) = 0$$

$$\underline{B_y = 0} \text{ and } \underline{B_x = 500 \text{ N}}$$

ENES110 ©Assakkaf_SP07

Example 2 (cont'd)

FBDs of members AB and BC:



Applying EofE to bar AB:

$$\rightarrow + \sum F_x = A_x - 500 = 0; \quad \underline{A_x = 500 \text{ N}}$$

$$\uparrow + \sum F_y = A_y - 1000 + 0 = 0; \quad \underline{A_y = 1000 \text{ N}}$$

Consider member BC:

$$\rightarrow + \sum F_x = 500 - C_x = 0; \quad \underline{C_x = 500 \text{ N}}$$


$$\uparrow + \sum F_y = C_y - 500 = 0; \quad \underline{C_y = 500 \text{ N}}$$

ENES110 ©Asst.Kaf_Sp07

Attention Quiz

- When determining the reactions at joints A, B, and C, what is the minimum number of unknowns for solving this problem?

- A) 3 B) 4
C) 5 D) 6

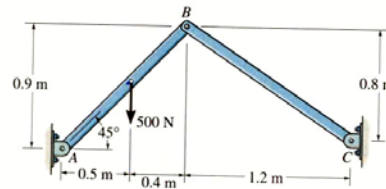

- For the above problem, imagine that you have drawn a FBD of member AB. What will be the easiest way to directly solve for the first unknown?

- A) $\sum M_C = 0$ B) $\sum M_B = 0$
C) $\sum M_A = 0$ D) $\sum F_x = 0$

ENES110 ©Asst.Kaf_Sp07